

» Cameras

Série 3 | Série 5 | Série 7



» Camera Bullet
2MP Jetcolor



» Camera Dome
2MP Jetcolor



» Camera Dome IP
5MP 2.8 mm Jetcolor



» Camera Bullet IP
5MP 3.6 mm Jetcolor



Camera IP bullet
LPR VF 2MP



» Camera Speed Dome
IP 30X Starvis



» Camera Bullet IP
5MP Starvis



» Camera Dome
IP 5MP Starvis



» Camera Bullet
IP Varifocal 5MP
Starvis

» About the PPA

We are the largest gate, door and barrier automation industry in Latin America, with the largest distribution network in the world. **We are very proud to be a 100% Brazilian** company and a pioneer in the sector, with a portfolio of more than 4 thousand products and solutions, distributed in more than 200 thousand resale points.

Since 1983, we have worked hard to bring technology, safety, innovation, comfort, protection and excellence to thousands of homes and businesses. We developed Jetflex technology, which produces ultra-fast automation systems, considered the fastest in the world.

» DISCOVER OUR TECHNOLOGIES

MONO

LEGERO

JETFLEX
TECHNOLOGY

JETFLEX
BRUSHLESS

24V

JETFLEX 24V

» Contact

info@ppaamerica.com

ppaamerica.com



Gate Operators
Garage Door Operators
Traffic Barriers and more.

ppaamerica.com



SLIDING CHAIN GATE OPENER

» NEXUS LINE

JETFLEX
TECHNOLOGYNEXUS
BRUTALLE SLS

Speed Gate weigh Cycle/hour

Up to 1.25 Ft/sec 3500 Lbs 60

NEXUS CUBE
1700 JETFLEXJETFLEX
TECHNOLOGY

Speed Gate weigh Cycle/hour

Up to 3 Ft/sec 1600 Lb 60



» F10-R

PHOTOCELL REFLECTIVE F10-R

The PPA reflective photocell is a device innovative and highly functional, designed to meet diverse needs in automation and access control systems. With a range of up to 8 meters, it offers excellent performance both indoors and outdoors, external devices, ensuring broad coverage and accuracy in detecting objects or movement.



SWING GATE OPERATOR

» PIVO
SK

MONO

Gate size Standard = Up to 6 Ft.
Super = Up to 9 Ft.

Gate leaf weigh 270 Lb

Cycle/hour 20



» PISTON CONDOMINIUM

MONO

Gate size Standard = Up to 6 Ft.
Super = Up to 10 Ft.
Mega = Up to 14 Ft.

Gate leaf weigh 660 Lb

Cycle/hour 60




AUTOMATIC BARRIER

» AUTOMATIC BARRIER K10

24V

Modern Design,
the perfect integration
with new projects.

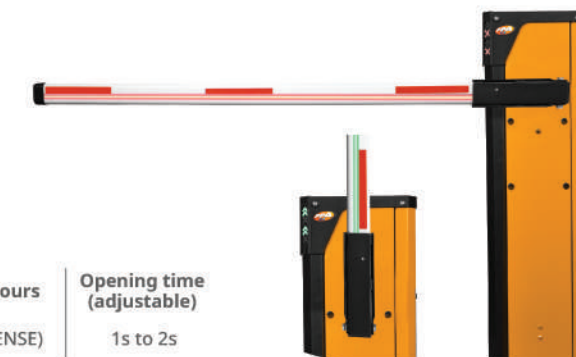

K10 MODEL

Barrier length (linear in aluminum)	Cycles/hours	Opening time (adjustable)
15 Ft	600 (INTENSE)	1s to 2s

» BC1

AUTOMATIC CHAIN BARRIER

The best option for controlling the flow
of vehicles in unauthorized places and times.



» RFID READER

The REFID900MHZ Reader is an advanced solution for vehicle identification and reading, designed to offer high performance and flexibility in various applications. Powered by 12Vdc (with power supply included), the reader is easy to install and ready to use.



SLIDING RACK AND PINION GATE OPENERS

» INDUSTRIAL LINE

DZ IND 1500

JETFLEX
TECHNOLOGYDZ BRUTALLE
3.0TJETFLEX
TECHNOLOGYSpeed
Up to 4 Ft/secGate weigh
Z12 = 1400 Kg
Z17 = 1100 KgCycle/hour
80Speed
Up to 2 Ft/secGate weigh
Z12 = 6600 Lb
Z17 = 5500 LbCycle/hour
150

» RESIDENTIAL LINE

DZ CUBE 1000

JETFLEX
TECHNOLOGYSpeed
up to 2.8 Ft/secGate weigh
2000 LbCycle/hour
50

AUTOMATIC DOORS

» RAC 24V

SLIDING DOORS

BODY
COLORS

WHITE BLACK

MODEL	RAC 24V	RAC JETFLEX
Opening speed (adjustable)	27" /sec	27" /sec
Cycles	60	60



» GIRO

SWINGING DOORS

BODY
COLORS

WHITE IN ALUMINUM BLACK

MODEL	GIRO JETFLEX	GIRO 24V
90° opening speed (adjustable)	2s	2s
Cycles	INTENSIVE	With up to 200 cycles with battery



» SENSOR MICRO-ONDAS SMI2



Combining microwave
technology and infrared,
this sensor offers a superior
performance in detecting
movement and presence,
providing greater
sensitivity and reliability.

» RADAR CAPTUR

Developed for environments
with PPA automatic doors,
that require opening without
physical contact.

» ROLLING DOOR
OPERATOR BR1

With the PPA technology in
development and manufactory
Up to 1000 pounds.

MONO



Output Frequency 60Hz

Maximum door mass 660 Lb

Cycle/day 6 cycles/day

ACCESSORIES

» ZAP 2

ZAP is a gate control developed by PPA,
offering two independent command keys for
greater flexibility in access control. Operating
at a frequency of 433.92 MHz with OOK
modulation, it provides high stability and low
power consumption, thanks to the
CR2032 battery, which is easy to replace.



» RECEPTOR ALCANCE

The PPA receiver for door automation and
automatic gates offers an efficient and safe
solution for access control. With the possibility
of operating in hold or pulse mode,
configurable by jumper, it is highly versatile and
adaptable to the user's needs.

» CONNECT SMART
ON MODULE

The Connect Smart ON Module is an advanced
solution for automation and control of PPA
devices. With a power supply of 9 to 15Vdc, it
offers Wi-Fi communication in the 802.11 b/g/n
2.4GHz standard and Bluetooth BLE 4.2,
providing fast and efficient connectivity.

» WAVE 125KHZ
CONTROLLER

The Connect Smart ON Module is an advanced
solution for automation and control of PPA devices.
With a power supply of 9 to 15Vdc, it offers Wi-Fi
communication in the 802.11 b/g/n 2.4GHz
standard and Bluetooth BLE 4.2, providing fast
and efficient connectivity.



» ELETROÍMÃ P200

The P200 Electromagnet is a robust and efficient solution for access control systems,
with a voltage of 12V and an impressive magnetic pull force of 200 kg, ensuring
safety and reliability. Made from steel sheets with electrostatic treatment and
painting, the electromagnet is highly resistant to corrosion, which increases its
durability and performance in outdoor environments.



» PROG

- Control center programming accessory
- Allows programming of central parameters
- Allows visualization of the number of gate cycles, faults and sensor status

